



Increase the accuracy of Alignment Data Records using Adequate Annotator Interface Schema

P.Dastagiri Reddy*1, G.V.Subba Reddy*2, P.Surya Kumar*3, V.Surendra Achari*4, D.Suresh*5

Asst. Professor, Dept of CSE, Santhiram Engineering College, Nandyal, Kurnool, AP, India

M.C.A Student, Dept of M.C.A, Santhiram Engineering College, Nandyal, Kurnool, AP, India

M.C.A Student, Dept of M.C.A, Santhiram Engineering College, Nandyal, Kurnool, AP, India

M.C.A Student, Dept of M.C.A, Santhiram Engineering College, Nandyal, Kurnool, AP, India

M.C.A Student, Dept of M.C.A, Santhiram Engineering College, Nandyal, Kurnool, AP, India

ABSTRACT:

Technology has its own way of communication to its surrounding and the need leads to the innovation. In this Paper, we have given emphasis on the web Data with the communicating to the database, which we call, is as in the terminology of data mining as ontology of Information. Database record linkage systems are well suited to handle the co reference resolution issue, but they do not take account of specific properties of ontological data, such as hierarchical relations between classes and specific data restrictions. Today's industry need to implement the web service in the process of light, high computer efficiency and lastly which we most time take to robustness proving all is the demanding trend, Hence we provide a collaborative model in the data center and the web service module to implement all client based requirement starting from the most basic one is the web service.

Keywords: Ontology, web database, Wrapper Mechanism

1. INTRODUCTION

In the Aspect of Introducing the web based database annotation; Ontologies have been often considered as a whole: data-level problems have been mostly treated as auxiliary and usually tackled together with

schema-level matching. The primary reason was that, until the emergence of the Linked Data initiative, there was a lack of substantial volumes of semantic data covering overlapping domains, and, therefore, there was no specific need to focus on the data-level integration issues. In



Web, service combinatory are language constructs providing the programmer with an opportunity to mimic the behavior of a web surfer when a fail occurs while retrieving a web page. In essence the constructs makes predefined algorithmic behavior scriptable like handling reloading of pages, retrying of requests, termination of requests taking to long, etc. The markup algebra allows for the extraction and manipulation of data from web pages with the help of algebraic operations on set of markup elements, so called piece-sets. After retrieving and parsing the page a piece can be defined as a contiguous text region in a document, identified by the starting and the ending position of the region. We can imagine positions as indices that indicate a character offset in the page. Pieces within piece-sets may overlap, be nested, or may belong to different pages. However, unlike mathematical sets that do not impose a particular ordering on their elements, piece-sets are always in a canonical representation in which pieces are ordered according to their starting position, and then their ending position in the document.

2. RELATED WORK

One classification of ontology matching approaches divides them into two major categories with regard to their granularity:

Element-level ones analyze schema concepts and data instances in isolation but not relations between them. Structure-level ones focus on relations between entities and the ontology as a whole.

In the database community work discussed at the structure level, With respect to input interpretation, the methods can be classified into:

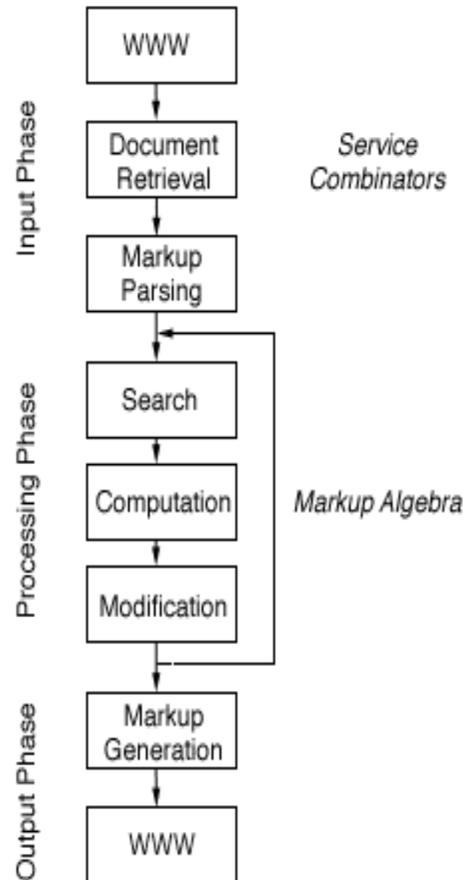


Fig. 2.1 Showing the Hierarchical Web Search Mechanism in the Ontology



- ❖ Syntactic, which consider the structure of input data. External, which exploit auxiliary resources in order to interpret the input, Semantic, which use formal reasoning techniques. Most of the commonly used techniques for instance matching belong to the group. At the element level these again include string similarity techniques, implemented by such ontology matching systems.
- ❖ A second group of syntactic element-level algorithms is constraint-based: these algorithms use internal structure of entity definitions, such as key properties and domain restrictions. In particular, they assume that objects are more likely to match if objects related to them also match and, conversely, mappings which contradict existing knowledge contained in one of the matched ontologies are unlikely to be accurate. Syntactic approaches at the structure level treat matched ontologies as graphs and try to match these graphs.

Attributed grammar rules describe source structure declaratively and are used in combination with pattern matching through regular expressions for managing extraction of data and assigning it to internal variables. The reason for using grammar rules is that pattern matching alone cannot handle data in irregular sequences or data that is nested.

Essentially a set of patterns can only describe the structure of a document as a flat set of objects. When the interpretation of patterns depends on their actual sequence or on their nesting structure patterns alone do not suffice.

3. METHODOLOGY

In the mechanism web Interface with data integration and making it accessible through HTML is one of the minor aspect in today's market of IT, but we concentrate on the some aspect where integration with annotation makes lead to the technological innovation which we put forward in the methodology. Until recently, the Semantic Web community has concentrated efforts on the schema matching problem. Now, with a constantly increasing amount of RDF data being published according to the Linked Data standards, the problem of instance-level integration is gaining importance. Dealing with RDF data sources distributed over the Web requires solving a fundamental problem of representing and managing information about URIs referring to identical entities. There are different possibilities, and several proposals have been put forward within the research community.

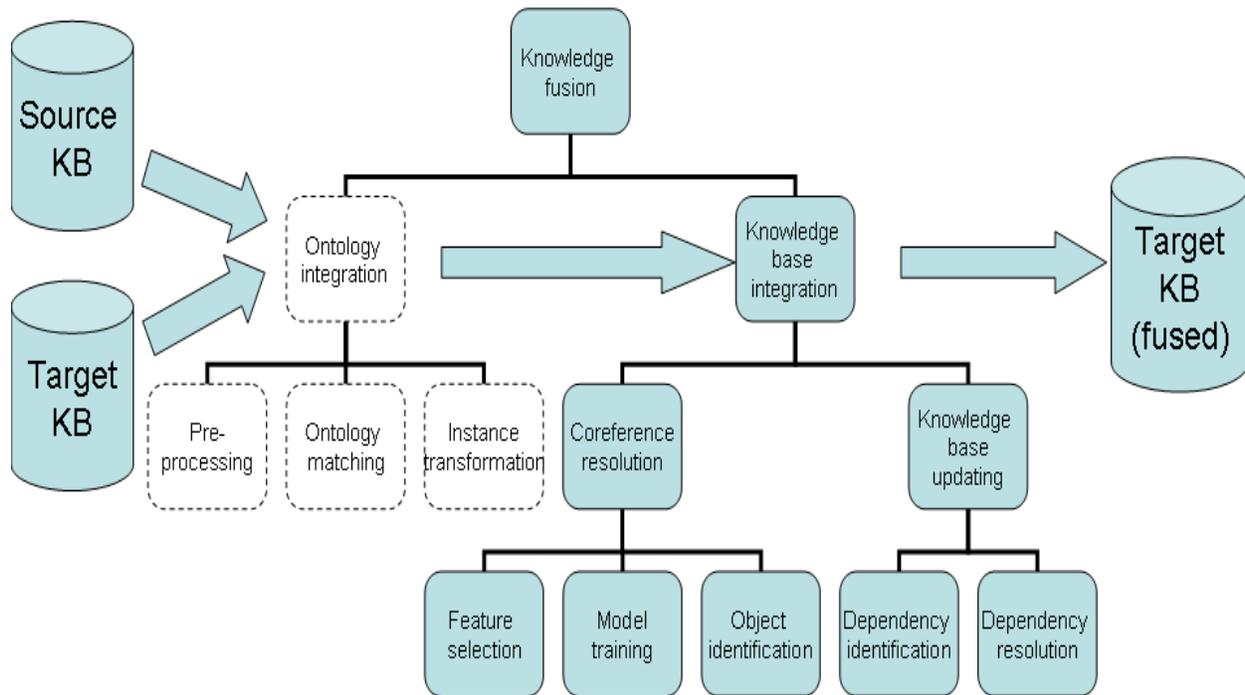


Fig.3.1 The Level Wise Knowledge Base Database Integration Architecture

Automatic matching algorithms can also produce errors, which lead to knowledge base inconsistencies. Processing inconsistencies during fusion is important not only because these affect logical reasoning, but also because each inconsistency normally indicates either a possible error in the data or a divergence of views between information sources.

Knowledge about the quality of data may be used to assign confidence values to class and property assertions. This is important when we need to judge whether a mapping, which violates the domain ontology, is incorrect or

the conflict is caused by a data statement. Knowledge about the "cleanness" of a source (e.g., whether duplicates occur in a given source) provides additional evidence about potential mappings. The method receives as its input a set of candidate mappings between individuals in source and target knowledge bases. In order to perform belief propagation, these mappings, along with relevant parts from both knowledge bases, must be translated into valuation networks. Building a large network from complete knowledge bases is both computationally expensive and unnecessary, as not all triples are valuable for analysis. Hence, we select only relevant triples considering only



statements and axioms which mutually influence each other. First, as in Chapter 4, these include the statements which, when taken together, lead to a conflict. Moreover, we include into the analysis the statements which can provide positive evidence and reinforce the belief values of some mappings

4. CONCLUSION

Web Interface is UI part where data source most of time would be from the database, but semantically if we have same data where search engine like google have its own algorithmic approach to provide the best of the mechanism to the user. Hence in this paper we put forward for the future aspect of the technology to provide ontology based mechanism of the best of the information in the ASCII mechanism. Semantic Web data combine features of both relational databases and symbolic logical knowledge bases. The information integration problem has been studied in both these domains and multiple approaches have been developed. The main relevant perspectives in the database research on data integration include:

- The use of attribute similarity measures for record linkage;
- The use of provenance for inconsistency resolution.

5. REFERENCES

[1] H. He, W. Meng, C. Yu, and Z. Wu, "Constructing Interface Schemas for Search

Interfaces of Web Databases," Proc. Web Information Systems Eng. (WISE) Conf., 2005.

[2] Zharko Aleksovski, Michel C. A. Klein, Warner ten Kate, and Frank van Harmelen. Matching unstructured vocabularies using a background ontology. In 15th International Conference on Knowledge Engineering and Knowledge Management (EKAW 2006), pages 182{197, 2006.

[3] P. Chan and S. Stolfo, "Experiments on Multistrategy Learning by Meta-Learning," Proc. Second Int'l Conf. Information and Knowledge Management (CIKM), 1993.

[4] W. Bruce Croft, "Combining Approaches for Information Retrieval," Advances in Information Retrieval: Recent Research from the Center for Intelligent Information Retrieval, Kluwer Academic, 2000.

[5] V. Crescenzi, G. Mecca, and P. Merialdo, "RoadRUNNER: Towards Automatic Data Extraction from Large Web Sites," Proc. Very Large Data Bases (VLDB) Conf., 2001.

[6] S. Dill et al., "SemTag and Seeker: Bootstrapping the Semantic Web via Automated Semantic Annotation," Proc. 12th Int'l Conf. World Wide Web (WWW) Conf., 2003.

[7] H. Elmeleegy, J. Madhavan, and A. Halevy, "Harvesting Relational Tables from Lists on the Web," Proc. Very Large Databases (VLDB) Conf., 2009.



[8] D. Embley, D. Campbell, Y. Jiang, S. Liddle, D. Lonsdale, Y. Ng, and R. Smith, "Conceptual-Model-Based Data Extraction from Multiple-Record Web Pages," *Data and Knowledge Eng.*, vol. 31, no. 3, pp. 227-251, 1999.

[9] D. Freitag, "Multistrategy Learning for Information Extraction," *Proc. 15th Int'l Conf. Machine Learning (ICML)*, 1998.

[10] D. Goldberg, *Genetic Algorithms in Search, Optimization and Machine Learning*. Addison Wesley, 1989. Performance Using Local Interface Schema

[11] S. Handschuh, S. Staab, and R. Volz, "On Deep Annotation," *Proc. 12th Int'l Conf. World Wide Web (WWW)*, 2003.

[12] S. Handschuh and S. Staab, "Authoring and Annotation of Web Pages in CREAM," *Proc. 11th Int'l Conf. World Wide Web (WWW)*, 2003.

[13] B. He and K. Chang, "Statistical Schema Matching Across Web Query Interfaces," *Proc. SIGMOD Int'l Conf. Management of Data*, 2003.

[14] H. He, W. Meng, C. Yu, and Z. Wu, "Automatic Integration of Web Search Interfaces with WISE-Integrator," *VLDB J.*, vol. 13, no. 3, pp. 256-273, Sept. 2004.

Santhiram Engineering
College, Nandyal, Kurnool(Dt), AP, India.



P.SURYA KUMAR,

Presently pursuing MCA in Santhiram Engineering College, Nandyal, Kurnool (Dt), AP, India. SanthiramEngineering



P.DASTAGIRI REDDY

(M.Tech), Assistant Professor,